


Product data sheet Industrial basket 44 litre.

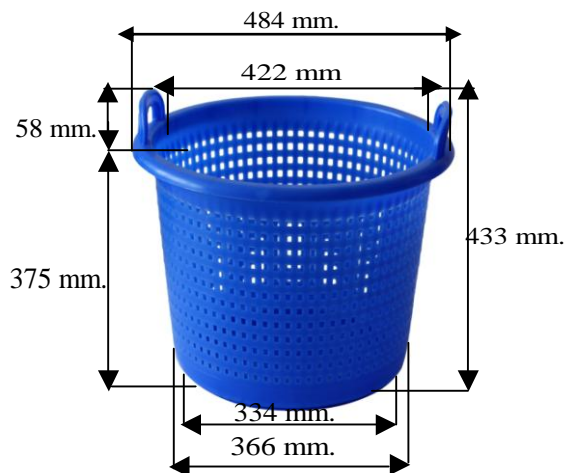

Product(description)	Product code	Material
Industrial basket 44 ltr. blue	0700045	LLDPE
Industrial basket 44 ltr. orange	0700046	LLDPE

Capacity	Litres	Gallons
Industrial basket 44 ltr. blue	44	11,5
Industrial basket 44 ltr. orange	44	11,5

Weight	Grams	Ounces
Industrial basket 44 ltr. blue	1500	52,91
Industrial basket 44 ltr. orange	1500	52,91

Product identification	
Manufacturer ID	: bottom basket
Date Clock	: bottom basket
Country of origin	: The Netherlands

Temperature
Recommended temperature for normal use is a maximum of 70°C/158°F
The peak melting temperature is 123°C/253°F (the point where the material melts)
The vicat softening temperature is 96°C/205°F (the point where the material is at a temperature that there is a pin to pass through with minimal pressure)
With this information we would not recommend to use the industrial baskets under conditions of 80/90°C - 176/194°F or higher, since the life span of the basket is then minimal
Use under conditions with temperatures around 50/60°C- 122/140°F are no problem

Other information
DoC and migration test report baskets available on request
ISO Certificate manufacturer available on request
Product Data Sheet material LLDPE available on request
Other colours available on request

Dimensional tolerances	%
Height and diameter	± 2.5

Weight tolerance
All baskets have a tolerance of ± 4 % on the initial weight mentioned on this data sheet